
How to confirm the firmware version?


Steps to get the firmware version:

Step 1: Open the cover of i-7550

Step 2: Close the initial pin (JP5) by jumper (Default is open)

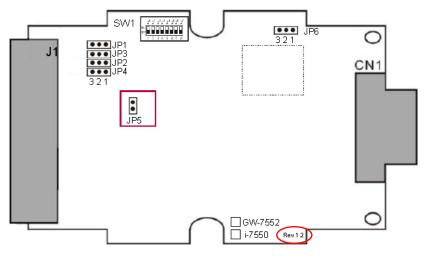


Rev 1.2

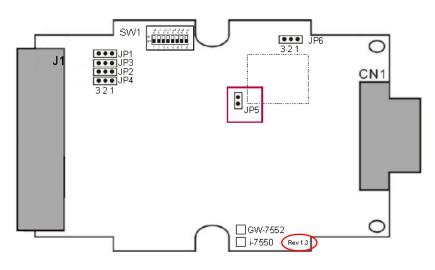


Rev 1.3

Step 3: Connect the power supply

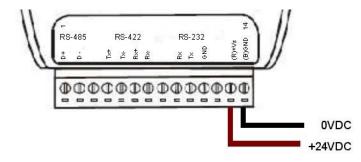

Step 4: Connect the PC and the i-7550 by Com Port (RS-232)

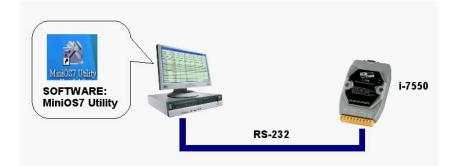

Step 5: Turn the power on


Step 6: Run MiniOS7 utility on the PC (You can download MiniOS7 Utility at

http://ftp.icpdas.com.tw/pub/cd/8000cd/napdos/minios7/utility/minios7_utility/_.)

Step 7: Connect MiniOS7 Utility and the i-7550 by click the connection button.

Look jn: 🛅 test3	S 🕫 💌	Lock in: Disk A	~	
Name □ GSD □ 7186E □ 7186E □ 7550-20 ■ 7550-20 ■ 7550-20 ■ 3550-20 ■ 35950-20 ■	Size Type File Folder Connection Connection Baud Rate: 115200 Data Bit: 8 Parity: 0(None) Stop Bit: 1	No Name Image: Constraint of the state of the	Size	Modifie
¢ II	OK Cancel			

Step 8: Get the firmware version.

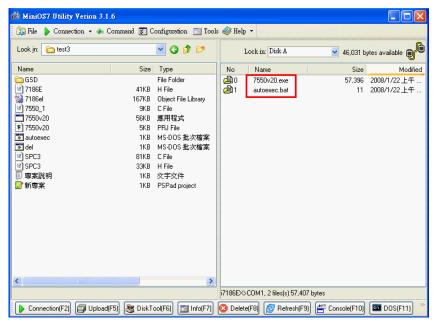


7550v20.exe is the firmware name of I-7550 in this example.

It means the firmware version is 2.0

Step 9: Turn the power off

Step 10: Open the initial pin (JP5) by remove the jumper

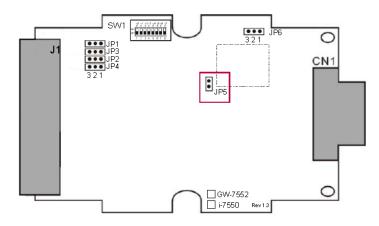

Step 11: Close the cover of i-7550