



## MN-D604-DIN

Distributed Motionnet 32-ch Isolated DO Module

### Features

- Maximum communication speed: 20 Mbps
- 32-ch isolated digital outputs
- Each Motionnet transfer Line: connect modules up to 64
- Designing isolation protection: power, communication, I/O
- LED Diagnostics for communication and I/O status
- High current sinking capability (100 mA)
- Fast Output Response Time within 0.5  $\mu$ s




### Introduction

The **MN-D604-DIN** is an I/O expansion device for Motionnet systems, and is equipped with 32 isolated digital output channels. Each Motionnet communication line can be connected to up to 64 modules, meaning that the I/O can be expanded to 2048 output channels. The communication time required by each MN-D604-DIN is 15.1  $\mu$ s. If 64 modules have been connected, signals for 2048 points on 64 modules can be sent and received within 0.97 msec. The update of the I/O status is completed automatically through the Motionnet system at a constant interval, and setting interrupts for specific input points that the customer wants to monitor can help prevent CPU time from being wasted by repetitive polling when there is nothing else for the issuing process to do.


### Specifications

Model	MN-D604-DIN
<b>Hardware</b>	
Connector	6-pin pluggable terminal block x 8
<b>LED Indicators</b>	
Status	Communication state (Link, Error) Internal 3.3 V Power Termination Resistor Switch Input/Output state
<b>Digital Output</b>	
Channels	32
Type	Open Collector (Sink), with internal flywheel diode
Load Voltage	+30 VDC max.
Load Current	100 mA max. for each channel
Isolation Voltage	2500 Vrms
<b>Motionnet</b>	
Communication Connectors	Mini-clamp Connector x 2
Transfer Speed	Selectable 2.5, 5, 10 or 20 Mbps by DIP Switch
Cyclic Time	15.1 $\mu$ s per device (20 Mbps)
<b>Power</b>	
Input Range	24 VDC (1000 V isolated)
Consumption	2 W Max.
<b>Mechanical</b>	
Casing	Aluminum
Dimensions (mm)	83 mm x 93 mm x 63 mm
Installation	DIN-Rail mounting
<b>Environment</b>	
Operating Temperature	0 ~ +60 °C
Storage Temperature	-20 ~ +80°C
Humidity	10 ~ 90% RH, Non-condensing

### Dimensions: (Units: mm)

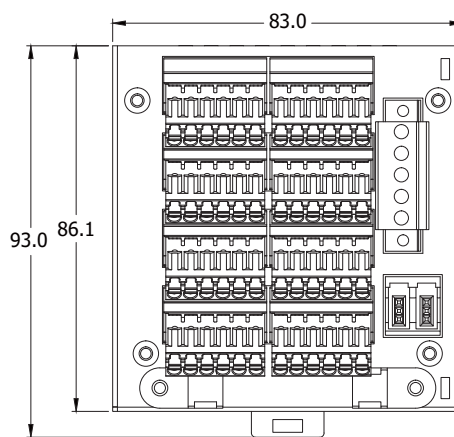


Front View

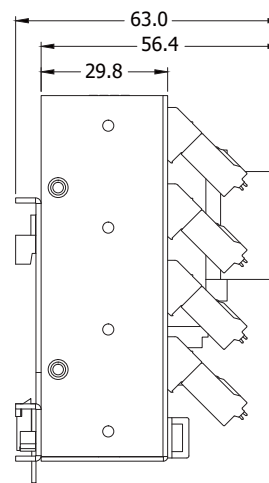

Left Side View

## Pin Assignments

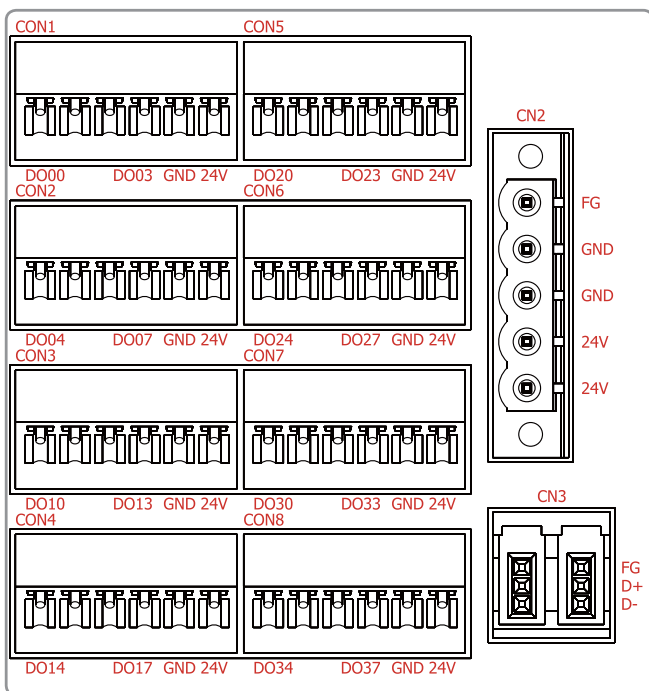

NO.	Pin Define	Specifications	I/O Define
<b>CN3</b>			
1	F.G.	Frame Ground	-
2	Data+	Positive terminal of differential communication signal	Bidirectional
3	Data-	Negative terminal of differential communication signal	Bidirectional
<b>CN2</b>			
1	F.G.	Frame Ground	-
2 ~ 3	GND	External Ground	Input
4 ~ 5	24V	External 24V (+)	Input
<b>CON1 ~ 8</b>			
1 ~ 4	DOxx	Digital output channels 00 ~ 31	Output
5	GND	External Ground	Connect to CN2
6	24V	External 24V (+)	Connect to CN2

## Ordering Information

<b>MN-D604-DIN CR</b>	Distributed Motionnet 32-ch Isolated DO Module with Mini-clamp Connector (RoHS)
-----------------------	---

## Related Products

PISO-MN200(T/EC) CR	PCI Bus, Dual-line Motionnet Master Card (RoHS)
MN-SERVO-xxx(-EC) Series CR	Distributed Motionnet Single-axis Motion Control Modules (MJ3 / PA4 / YSV / DAA) (RoHS)
MN-2091U(-T) CR	Distributed Motionnet Single-axis Universal Motion Control Module (RoHS)
MN-MP4U-DIN CR	Distributed Motionnet Four-axis Universal Motion Control Module (RoHS)
MN-3254(T) CR / MN-D622-DIN CR	Distributed Motionnet 16-ch Isolated DI 16-ch Isolated DO Module (RoHS)
MN-3253(T) CR / MN-D640-DIN CR	Distributed Motionnet 32-ch Isolated DI Module (RoHS)
MN-3257(T) CR	Distributed Motionnet 32-ch Isolated DO Module (RoHS)
MN-AD8-DIN CR	Distributed Motionnet 8-ch Analog Input Module (RoHS)
MN-DA2-DIN CR	Distributed Motionnet 2-ch Analog Output Module (RoHS)
MN-HUB4(EC) CR	Distributed Motionnet 4 Port Hub Module (RoHS)

## Accessories

Mini Clamp Wiremount Plug			Applicable Wire		
ICP DAS Part No.	Cover Color	3M Part No.	AWG No.	Cross-sectional Area (mm <sup>2</sup> )	Finished External Diameter Φ (mm)
4PKD1O0000001	Gray	37103-2206-000FL	20 – 22	0.3 – 0.5	1.6 – 2.0
4PKD1O0000002	Red	37103-3101-000FL	24 – 26	0.14 – 0.3	0.8 – 1.0
4PKD1O0000003	Orange	37103-3163-000FL	24 – 26	0.14 – 0.3	1.2 – 1.6

